

Wall inlets


# GDK

Wall inlet curved or straight flap single turning point GDK/RDK




- ✓ Curved or straight flap with bottom hinge
- ✓ Optimal air control due to curved flap
- ✓ Self-opening or spring closed
- ✓ Insulated flap

### Suitable sectors



### Options

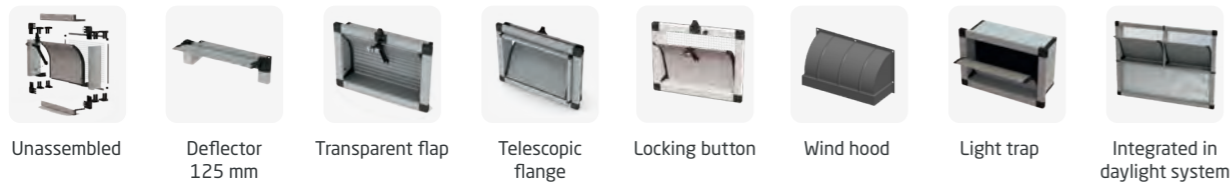

Type	Installation dimensions (mm)			Net surface	Capacity (m3/hr)			Pull force	Stroke length
	W	H	D		10 Pa	20 Pa	30 Pa		
<b>RDK-2500</b>	540 mm	345 mm	100 mm	1525 cm <sup>2</sup>	1900	2500	3200	1.3 kg	440 mm
<b>GDK-2500</b>	540 mm	345 mm	100 mm	1525 cm <sup>2</sup>	1900	2500	3200	1.3 kg	520 mm
<b>GDK-3500</b>	640 mm	395 mm	100 mm	2130 cm <sup>2</sup>	2650	3500	4450	1.5 kg	580 mm
<b>GDK-5350</b>	840 mm	445 mm	100 mm	3240 cm <sup>2</sup>	4050	5350	6800	2 kg	650 mm
<b>GDK-5450</b>	1120 mm	345 mm	100 mm	3294 cm <sup>2</sup>	4100	5450	6900	2 kg	520 mm
<b>GDK-7500</b>	1040 mm	495 mm	100 mm	4550 cm <sup>2</sup>	5700	7500	9550	2.2 kg	720 mm

### Available dimensions

<b>Width</b>	200-1120 mm	In steps of 1 mm
<b>Height</b>	345-545 mm	345/370/395/445/495/545 mm
<b>Depth</b>	100-500 mm	In steps of 25 mm

