

Wall inlets


# GKK

Wall inlet curved flap double turning point GKK




- ✓ Curved flap with center hinge
- ✓ Optimal air control due to curved flap
- ✓ Self-opening or spring closed
- ✓ Insulated flap

### Suitable sectors



### Options

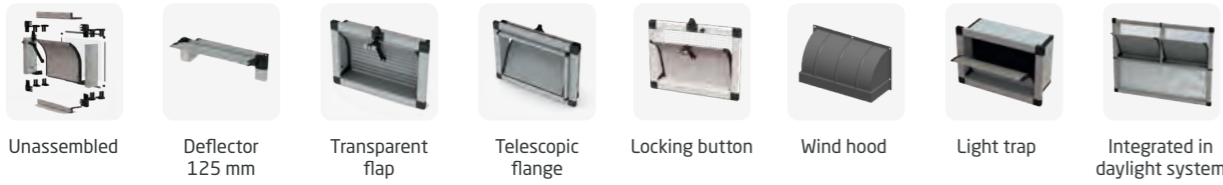

Type	Installation dimensions (mm)			Net surface	Capacity (m3/hr)			Pull force	Stroke length
	W	H	D		10 Pa	20 Pa	30 Pa		
GKK-2500	540 mm	345 mm	100 mm	1525 cm <sup>2</sup>	1900	2500	3200	1.3 kg	460 mm
GKK-3500	640 mm	395 mm	100 mm	2130 cm <sup>2</sup>	2650	3500	4450	1.5 kg	520 mm
GKK-5350	840 mm	445 mm	100 mm	3240 cm <sup>2</sup>	4050	5350	6800	2 kg	590 mm
GKK-5450	1120 mm	345 mm	100 mm	3294 cm <sup>2</sup>	4100	5450	6900	2 kg	460 mm
GKK-7500	1040 mm	495 mm	100 mm	4550 cm <sup>2</sup>	5700	7500	9550	2.2 kg	660 mm

### Available dimensions

Width	200-1120 mm	In steps of 1 mm
Height	345-545 mm	345/370/395/445/495/545 mm
Depth	100-500 mm	In steps of 25 mm

