

Daylight systems

RP-SK

Blackout side window RP-SK




- ✓ Meets the requirements of KAT/QS/SKAL/MDV/BLK
- ✓ Stepless blackout from 0-100%
- ✓ Uniform light distribution
- ✓ High insulation value
- ✓ Completely assembled
- ✓ Spring closed

Suitable sectors



Options

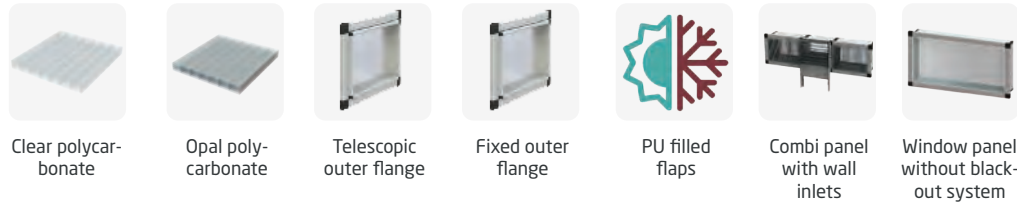

Type	Installation dimensions (mm)			Net surface	Pull force	Stroke length
	W	H	D			
RP-SK 2006-500	2006 mm	500 mm	200 mm	8.800 cm ²	7.5 kg	300 mm
RP-SK 2251-500	2251 mm	500 mm	200 mm	9.900 cm ²	7.5 kg	300 mm
RP-SK 2496-500	2496 mm	500 mm	200 mm	11.000 cm ²	7.5 kg	300 mm
RP-SK 2006-800	2006 mm	800 mm	200 mm	14.700 cm ²	9 kg	300 mm
RP-SK 2251-800	2251 mm	800 mm	200 mm	16.500 cm ²	9 kg	300 mm
RP-SK 2496-800	2496 mm	800 mm	200 mm	18.300 cm ²	9 kg	300 mm

Available dimensions

Width	658-2618 mm	In steps of 122,5 mm
Height	400-1120 mm	In steps of 1 mm
Depth	200-500 mm	In steps of 25 mm

